


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 29 TOWNSHIP 15 RANGE 5
DATE: 6-28-05
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison (no cap)
METHOD OF ESTABLISHMENT: County:

IN. S.P.C. E ZONE NAD '83

NAME: 15052901
N: 497106.3850(m)
E: 70688.0940(m)

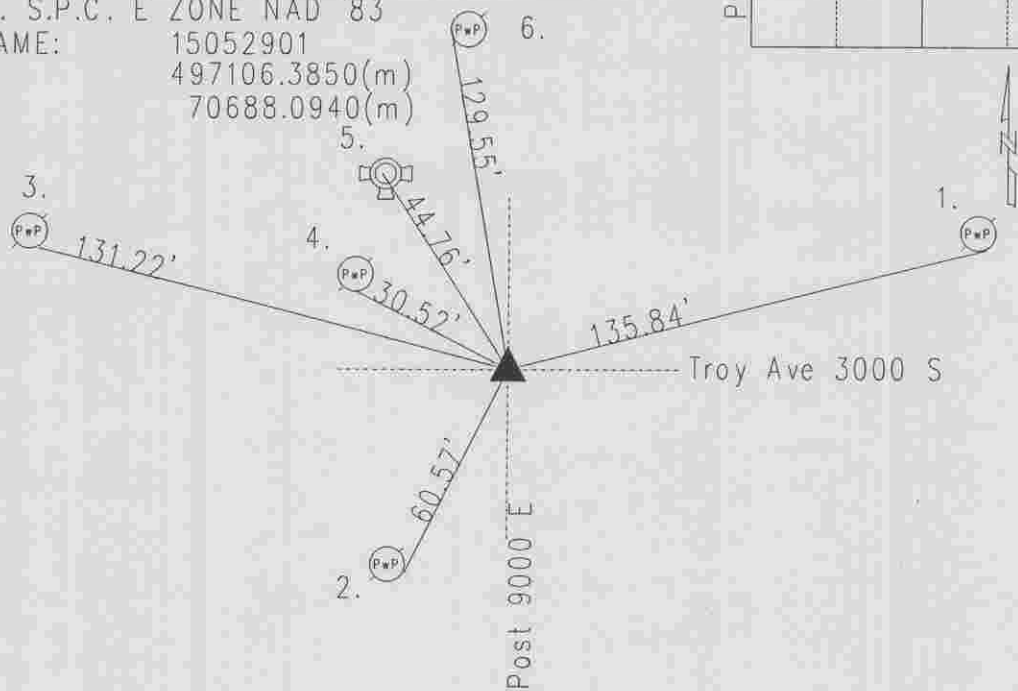

Original post set 1920 by Hendricks with witness: 14" beech N 3 links, 14" dogwood S 42 E 11 links per Marion County Atlas pg. 14. Hosbrook 4-18-1850 called no monument or stone; but, witness found: 18" beech N 45 1/2 W 79 links, 15" beech S 6 E 72 links per Franklin Township Legal Survey Book pg. 9. Baden 8-8-55 called a railroad spike. Hankins 6-23-58 called a road nail w/brass washer. McLand 1-30-69 called a PK nail. McLand 5-24-72 called the same. Hiselman 12-5-75 called a PK nail. Wilcoxen 6-2-80 called a PK nail. Gries 8-15-89 called a PK nail. Wilcoxen excavated 6-25-93 found PK nail at surface. Road nail w/washer found 6 1/2 " down. 1/2" steel pipe found 12" down. Stone fd 18" dn. Size: 12"x10"x6". Harrison set 6-14-93. Re-tied 8-26-00 by Wilcoxen. Re-tied 6-28-05 by Wilcoxen.

15052901

REF.	DISTANCE	DESCRIPTION
1.	135.84'	PK nail S PwP#1-651AA 4'up
2.	60.57'	Road nail SF PwP#3-651B 12"up
3.	131.22'	Mag nail w/bw S PwP#84-651 A 4"up
4.	30.52'	Mag nail w/bw S PwP#19-651A 8"up
5.	44.76'	Top nut of fire hydrant
6.	129.55'	PK nail W PwP#21-651 A